


**PANNELLI A LED 60X60 COMFORT, UGR<16 - IK08**

**PANNELLI LED serie COMFORT  
UGR<16 | IK08 | NO FLICK**




**CORNICE BIANCA**

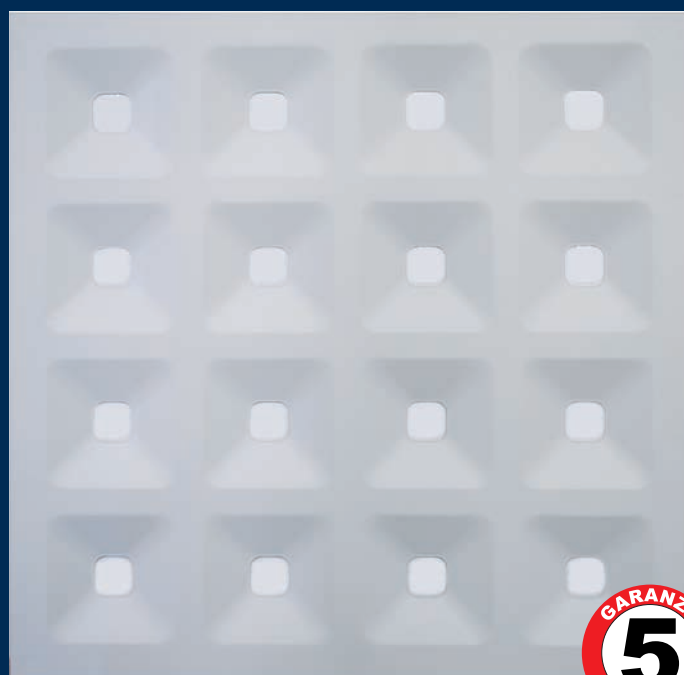

	<b>39.9P068034C</b>	<b>39.9P068034N</b>
34W	4410 lm	4650 lm
32W	4275 lm	4500 lm
30W	4030 lm	4250 lm
27W	3750 lm	3950 lm
24W	3320 lm	3500 lm
21W	2990 lm	3150 lm
18W	2510 lm	2650 lm
15W	2130 lm	2250 lm

Le potenze sono selezionabili tramite dip switch presente sul driver in dotazione.

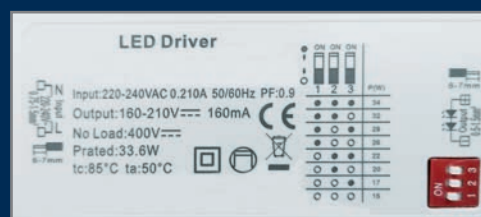

Codice	Watt	Colore	Lumen	Angolo Fascio	CRI	Dimensioni
<b>39.9P068034C</b>	34W	3000K	<b>4410</b>	BA 75°	80	595x595x18mm
<b>39.9P068034N</b>		4000K	<b>4650</b>			

**OPZIONAL**

Codice	Descrizione
<b>39.9P068034AW</b>	FRAME MONTAGGIO A TETTO PER PANNELLI LED 39.9P068034*, L.600x600xH.70mm, Bianco
<b>39.9P068034ST</b>	Kit 4 Staffe per montaggio ad Incasso per pannelli 39.9P068034*
<b>39.9P064040R</b>	kit 4 tiranti con cavo in acciaio per pannelli 39.9P064*, 39.9P065*, 39.9P036* e 39.9P034*, L.1m
<b>41.TEC026</b>	Kit Conversione in Emergenza Luci LED, In 100-277Vac - Out 220Vac, Max Carico 40W

**Montaggio a Sospensione**



**Montaggio a Sospensione con Frame**

